

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 306 519 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
02.05.2003 Bulletin 2003/18

(51) Int Cl.7: **E21B 43/10**

(21) Application number: **02257321.6**

(22) Date of filing: **22.10.2002**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
IE IT LI LU MC NL PT SE SK TR
Designated Extension States:
AL LT LV MK RO SI

- Schwendemann, Kenneth
Flower Mound, Texas 75022 (US)
- Towers, Darrin
Carrollton, Texas 75007 (US)
- Echols, Ralph Harvey
Dallas, Texas 75287 (US)
- Shy, Perry Carter
Southlake, Texas 76092 (US)

(30) Priority: **23.10.2001 US 47628**

(71) Applicant: **Halliburton Energy Services, inc.**
Dallas, Texas 75381-9052 (US)

(74) Representative: **Curtis, Philip Anthony et al**
A.A. Thornton & Co.,
235 High Holborn
London WC1V 7LE (GB)

(72) Inventors:
• Gano, John
Carrollton, Texas 75007 (US)

(54) **Wear-resistant, variable diameter expansion tool and expansion methods**

(57) An expansion tool (100) for radially expanding a tubular deployed in a subterranean well by moving the expansion tool (100) axially through the well. The expansion tool (100) has a cone (102) which has wear fac-

es (128) attached thereto for contacting the interior surface of the pipe, tube, or screen during expansion. In an embodiment, the cone is a variable diameter cone. In an embodiment, the cone has a controlled egress seal thereon.

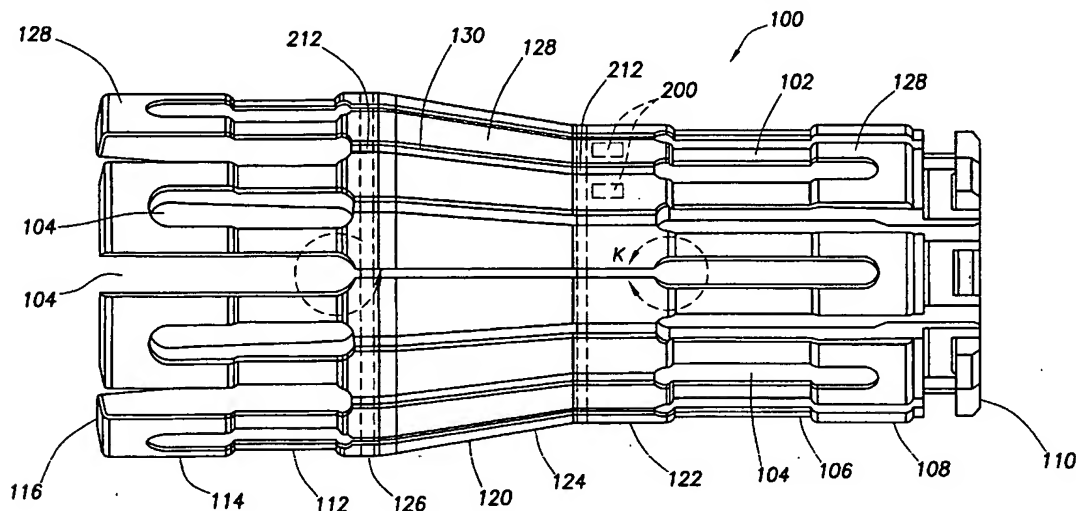


FIG.1

EP 1 306 519 A2

Description

[0001] The present invention relates to improved apparatus and methods for using radially expandable sand-control screen assemblies in a subterranean oil or gas well.

[0002] The control of the movement of sand and gravel into a wellbore has been the subject of much attention in the oil production industry. The introduction of sand or gravel into the wellbore commonly occurs under certain well conditions. The introduction of these materials into the well commonly causes problems including plugged formations or well tubing and erosion of tubing and equipment. There have therefore been numerous attempts to prevent the introduction of sand and gravel into the production stream.

[0003] One method of sand-control is the use of sand-control screen jackets to exclude sand from the production stream. The use of a radially expandable sand-control screen jacket includes causing the radial expansion of a screen jacket, and often base pipe, usually by drawing a mechanical expansion tool through the screen. There are several problems attendant with the apparatus and methods known in the art, some of which are enumerated below.

[0004] Expansion tools are typically in the form of a rigid mandrel introduced into the tubular to be expanded. The mandrel is dragged or pushed through the tubular, causing radial expansion by the application of brute force. The tubular itself is typically a corrosion resistant and structurally strong assembly of metal alloy. As a result, the expansion tool is subject to significant wear due to friction. There is therefore a need for a wear-resistant expansion tool.

[0005] Many expansion tools known in the art are of a fixed diameter. Commonly, the fixed-diameter expansion tool is introduced into the wellbore and positioned downhole, below the targeted production zone of the formation. The expandable tubular is then positioned adjacent to the targeted production zone, above the expansion tool, which is then drawn through the tubular to cause radial expansion. In such an operation, the fixed diameter of the expansion tool is required to be approximately equal to the desired size of the expanded tubular. This requirement often presents difficulties in positioning the tool. A few radially expandable expansion tools are known in the art, designed for introduction into the wellbore in a contracted state, then expanded for use. However, these attempted solutions are not completely satisfactory in structure having disadvantages in terms of manufacturing and operational complexity and strength. There is therefore a need for a new flexible expansion tool improving upon the art.

[0006] Further problems characteristic of downhole tubular expansion known in the art include: tearing of the tubular from over-expansion; under-expansion resulting in lack of contact between the expanded tubular and the wall of the borehole; and/or packing materials;

and the expansion tool becoming lodged in the borehole. A related problem inherent in known apparatus and methods lies in lack of knowledge concerning whether over-expansion or under-expansion have occurred, necessitating additional trips downhole. Thus, there is a need for expansion tools and methods providing data-gathering and adjustable expansion capabilities according to downhole conditions.

[0007] In addition to the problems with mandrel surface wear mentioned above, there inheres the problem of seal wear. Commonly, a relatively fluid-tight seal is provided between an expansion tool and expandable tubular. Typically, such seals are made from an elastomeric material and/or mechanical seal elements, and are subject to wear due to contact with the expandable tubular. There is therefore a need for an expansion tool having a seal with wear-resistant properties.

[0008] Often the walls of a wellbore can become packed or "skinned" during drilling. Flow resistance at the wall of the hole, or "skin factor" must often be reduced before a sand-control screen assembly is installed in the formation. It is known in the art to reduce skin factor by washing the wellbore with a fluid selected for well and formation conditions. The washing is typically performed in a trip downhole separate from the one or more trips needed for installing and expanding a screen jacket assembly. Each trip downhole requires additional time and expense. There is a need to provide for washing of the borehole ahead of the expanding tubular during an expansion procedure.

[0009] Downhole tubular expansion systems known in the art often require one or more surface connections to facilitate powering or controlling expansion apparatus or methods. Surface connections often pose problems associated with the need to pass restrictions in borehole diameter or direction. There is therefore a need for downhole expansion tools and methods requiring no physical connection to the surface.

[0010] In general, the inventions provide apparatus and methods for radially expanding a pipe, tube, screen, or screen assembly deployed in a subterranean well by moving an expansion tool axially through the well.

[0011] According to the apparatus and methods of the invention, an expansion tool apparatus may have one or more one wear faces attached to at least a portion of the outer periphery of a mandrel for contacting the interior surface of the pipe, tube, or screen during expansion. The one or more wear faces may be chemically or mechanically bonded to the mandrel and may be inlaid in one or more niches in the outer periphery of the mandrel. The wear faces may be made up of one or more rings bonded to, or floatingly attached to the mandrel.

[0012] In an aspect of the invention, an expansion tool has a controlled egress seal between the outer surface of the tool and the inside surface of the expandable tubular.

[0013] In another aspect of the invention, according to another aspect of the invention, an automatically var-

iable diameter expansion tool is provided having a variable diameter cone, which expands, and contracts based on input from one or more sensors. The sensors can measure parameters in the wellbore, such as contact pressure between the tubular and the cone.

[0014] In another aspect of the invention, an apparatus and method for expanding a length of screen assembly in a subterranean wellbore is provided.

[0015] Particular preferred embodiments of the invention will now be described in greater detail.

[0016] According to one aspect of there is provided an expansion cone apparatus for use in expanding a tubular in a subterranean well comprising: a cone body; and at least one wear face attached to the cone body.

[0017] According to another aspect of the invention there is provided a method of downhole tubular expansion comprising of the steps of: position an expansion cone in a tubular positioned in a subterranean wellbore, the expansion cone having a cone body and at least one wear face attached to the cone body; expanding the expansion cone; and moving the expanded cone axially along the tubular thereby radially expanding the tubular.

[0018] The above method and apparatus may advantageously include one or more of the following features.

[0019] The cone body is preferably a ductile metal, such as 4140 steel. Preferably the or each wear face is tungsten carbide. Desirably the or each wear face is mechanically or chemically bonded to the cone body.

[0020] In an embodiment, the cone body having at least one niche therein for receiving the at least one wear face.

[0021] The or each wear face may comprise at least one ring. The or each ring may comprise a plurality of wear face segments attached to one another by connectors.

[0022] In an embodiment, the cone body has expansion slots therein.

[0023] In an embodiment, the or each wear face is floatingly attached to the cone body.

[0024] In an embodiment, the cone has an automatically variable diameter, and there is provided at least one sensor for detecting wellbore parameters operably connected to the variable diameter cone body whereby the cone body diameter automatically varies based on the detected parameters.

[0025] In an embodiment, the cone body having an exterior surface, a controlled egress seal on the exterior surface of the cone body for sealing contact with the tubular.

In an embodiment, the cone body has at least one pivotal joint assembly.

[0026] According to another aspect of the invention there is provided an expansion tool for use in expanding a tubular in a subterranean wellbore comprising: an automatically variable diameter expansion cone; and at least one sensor for detecting parameters within the wellbore, the at least one sensor operably connected to the variable diameter expansion cone, the diameter of

the expansion cone automatically varying based on the detected parameters.

[0027] In an embodiment, the expansion tool further comprises at least one dilator operably connected to the expansion cone for expanding and contracting the expansion cone.

In an embodiment, the expansion cone has an interior surface, the at least one dilator connected to the interior surface. The or each dilator may be operable within a preselected range of expansion force.

[0028] In an embodiment, the or each sensor includes a contact stress sensor.

[0029] In an embodiment, the or each dilator is an electromechanical dilator.

[0030] In an embodiment, the expansion cone has expansion slots therein.

[0031] In an embodiment, the expansion tool further comprises at least one wear face attached to the expansion cone.

[0032] In an embodiment, the expansion tool further comprises a controlled egress seal on the expansion cone for sealing contact with the tubular.

[0033] In an embodiment, the expansion tool further comprising at least one pivotal joint assembly.

[0034] According to another aspect of the invention there is provided a method of downhole tubular expansion, the tubular disposed in a wellbore of a subterranean well, comprising of the steps of: positioning an automatically variable diameter expansion cone in the tubular; expanding the cone to a selected diameter; advancing the cone along the tubular, thereby radially expanding the tubular; and automatically varying the diameter of the cone as the cone is advanced along the tubular.

[0035] In an embodiment, the method further comprises the steps of: detecting parameters within the wellbore; and varying the diameter of the cone based on the detected parameters.

[0036] In an embodiment, the expansion cone includes at least one dilator for controlling the diameter of the cone. The or each dilator may be operable within a preselected range of expansion force.

[0037] In an embodiment, the step of detecting includes detecting the contact stress of the cone.

[0038] The expansion cone may have at least one wear face. The expansion cone may have a controlled egress seal on the expansion cone for sealing contact with the tubular. The expansion cone may have at least one pivotal joint assembly.

[0039] According to another aspect of the invention there is provided an expansion cone apparatus for use in expanding a tubular in a subterranean well comprising: a cone body having an exterior surface; and a controlled egress seal on the exterior surface of the cone body for sealing contact with the tubular.

Preferably, the controlled egress seal is a labyrinthine seal. More preferably, the labyrinthine seal is of stainless steel.

[0040] The controlled egress seal is preferably de-

signed to direct fluid flow within a subterranean well.

[0041] In an embodiment, the cone body has a forward end, the controlled egress seal being located at the forward end of the cone.

[0042] In an embodiment, the sealing contact does not include physical contact between the tubular and the controlled egress seal.

[0043] At least one wear face may be attached to the cone body. The diameter of the cone body may be automatically variable.

[0044] In an embodiment, the expansion cone apparatus further comprises at least one pivotal joint assembly.

[0045] According to another aspect of the invention there is provided a method of tubular expansion, the tubular positioned in the wellbore of a subterranean well, comprising the steps of: positioning an expansion cone in the tubular, the expansion cone having a cone body with an exterior surface and a controlled egress seal on the exterior surface for sealing contact with the tubular; expanding the expansion cone; and moving the expanded cone axially along the tubular thereby expanding the tubular.

[0046] Preferably, the controlled egress seal is a labyrinthine seal. More preferably, seal is stainless steel.

[0047] In an embodiment, the controlled egress seal directs fluid flow within the wellbore ahead of the expansion cone apparatus as it is moved axially along the tubular.

[0048] In an embodiment, the cone body has a forward end, wherein the controlled egress seal is on the forward end of the cone body.

[0049] In an embodiment, the sealing contract does not include physical contact between the tubular and the controlled egress seal.

[0050] The cone body may have at least one wear face attached thereto. The cone body may further comprise at least one pivotal joint assembly.

[0051] The cone body may be automatically variable, and the method may further comprise the step of automatically varying the diameter of the cone body as it is moved along the tubular.

[0052] According to another aspect of the invention there is provided a method of expanding a screen assembly in a subterranean wellbore, the method comprising the steps of: (1) positioning, adjacent the screen assembly, an expansion tool having an upper and lower body, an anchoring mechanism located in the upper body, an expansion cone assembly located in the lower body, and a force generator operable to vary the distance between the anchoring mechanism and the expansion assembly; (2) radially expanding the expansion assembly; (3) setting the anchoring mechanism; (4) activating the force generator to lengthen the distance between the anchoring mechanism and the expansion assembly, thereby forcing the expansion assembly through the screen assembly and radially expanding the screen assembly; (5) retracting the anchoring mechanism;

(6) activating the force generator to shorten the distance between the anchoring mechanism and the expansion assembly; and (7) repeating steps (3) to (6) as desired.

[0053] In an embodiment, the anchoring mechanism comprises a slip. In an embodiment, the anchoring mechanism further comprises a packer.

In an embodiment, the force generator comprises a double-piston assembly. The anchoring mechanism and force generator may be operable via fluid pressure.

[0054] In an embodiment, the screen expansion method is performed from the top down.

[0055] According to another aspect of the invention there is provided an expansion cone apparatus for use in expanding tubulars in a subterranean well comprising: an expansion cone body having multiple cone sections; and at least one joint assembly pivotally connecting the cone sections.

[0056] In an embodiment, the or each joint assembly is a knuckle joint.

[0057] In an embodiment, the expansion cone body has a length, and there are multiple joint assemblies are spaced along the length of the cone body.

In an embodiment, the expansion cone apparatus further comprises at least one wear face attached to the cone body. The at least one wear face may comprise at least one wear ring. The expansion cone body may have expansion slots therein.

[0058] In an embodiment, the diameter of the expansion cone body is automatically variable.

[0059] In an embodiment, the expansion cone apparatus further comprises a controlled egress seal mounted on the exterior surface of the cone body.

[0060] According to another aspect of the invention there is provided a method of tubular expansion, the tubular positioned in the wellbore of a subterranean well, comprising the steps of: positioning an expansion cone in the tubular, the expansion cone having an expansion cone body with multiple cone body sections and at least one joint assembly pivotally connecting the cone sections; expanding the expansion cone; and moving the expanded cone axially along the tubular thereby radially expanding the tubular.

[0061] In an embodiment, the or each joint assembly is a knuckle joint.

[0062] In an embodiment, the expansion cone body has a length, and there are multiple joint assemblies are spaced along the length of the cone body.

The expansion cone may further comprise at least one wear face attached to the cone body. The or each wear face may comprises at least one wear ring. The expansion cone body may have expansion slots therein.

[0063] The diameter of the expansion cone body may be automatically variable, and the method may further comprise the step of automatically varying the diameter of the expansion cone.

[0064] In an embodiment, the expansion cone further comprise a controlled egress seal mounted on the ex-

terior surface of the cone body.

[0065] Reference is now made to the accompanying drawings in which:

FIGURE 1 is a side elevational view of an embodiment of a variable diameter expansion tool with hardened wear faces, according to the invention; FIGURE 2 is an elevational partial cross-sectional view of another embodiment of an expansion tool according to the invention;

FIGURE 3 is a partial elevational view of another embodiment of a tool according to the invention; FIGURE 4 is an elevational view of another embodiment of a tool according to the invention;

FIGURE 5 is a cross-sectional view of a wellbore having an embodiment of a tool according to the invention disposed therein.

FIGURE 6 is a cross-sectional view of a wellbore having an embodiment of an expansion tool assembly according to the invention disposed therein;

FIGURE 7 is a cross-sectional view of a wellbore having an embodiment of an expansion tool assembly according to the invention disposed therein; and FIGURE 8 is a partial cross-section of another embodiment of a tool according to the invention.

[0066] The present invention will be described by reference to drawings showing one or more examples of how the inventions can be made and used. In these drawings, reference characters are used throughout the several views to indicate like or corresponding parts. In the description which follows, like or corresponding parts are marked throughout the specification and drawings with the same reference numerals, respectively. The drawings are not necessarily to scale and the proportions of certain parts have been exaggerated to better illustrate details and features of the invention. In the following description, the terms "upper," "upward," "lower," "below," "downhole," "longitudinally," and the like, as used herein, shall mean in relation to the bottom or furthest extent of, the surrounding wellbore even though the wellbore or portions of it may be deviated or horizontal. Correspondingly, the "transverse" orientation shall mean to orientation perpendicular to the longitudinal orientation. The term "sand-control" used herein means the exclusion of particles larger in cross section than a chosen size, whether sand, gravel, mineral, soil, organic matter, or a combination thereof. As used herein, "real-time" means less than an operationally significant delay but not necessarily simultaneously.

[0067] Apparatus and methods for constructing and deploying screen jackets are used in conjunction with the inventions, but are not critical thereto. Exemplary sand-control screens and methods of their deployment in a well are disclosed in United States Patent Numbers 6,931,232 and 5,850,875, and Application Serial Number 09/627,196.

[0068] Conventionally, a borehole is drilled into the

earth intersecting a production zone. A well casing is typically installed in the borehole. A radially expandable screen jacket assembly may be inserted into the portion (s) of the borehole adjacent the production zones. The connection between the casing and the radially expandable screen jacket assembly may be made in the conventional manner. The wall of the wellbore is substantially cylindrical forming a substantially annular space, but typically has irregularities more or less randomly distributed throughout its length.

[0069] Generally, with the unexpanded screen jacket assembly inserted into the desired location of the wellbore in the conventional manner, an expansion tool is moved longitudinally through the screen jacket assembly causing it to radially expand to a larger diameter to substantially fill the annular space making contact with the wellbore wall. The particulars of the apparatus and methods are further set forth in the following description.

[0070] A flexible expansion tool for use to expand tubulars in a subterranean well is described with reference primarily to Figure 1. the tool 100 has a cone 102 preferably made of 4140 steel, although other strong, ductile metallic or composite materials may be used. The cone 102 has expansion slots 104 arranged to facilitate radial flexibility. The expansion slots 104 are preferably arranged in a symmetrical pattern as shown in Figure 1, but may be shaped differently or arranged asymmetrically. The cone 102 preferably has a forward portion 106 substantially cylindrical in shape. The forward portion 106 preferably has a raised section 108, preferably near its forwardmost end 110. An aft portion 112 of the cone 102 is also typically substantially cylindrical in shape and larger in overall diameter than the raised section 108 of the forward portion 106. The aft portion 112 also preferably has a raised section 114, typically near its aftmost end 116. Between the forward portion 106 and aft portion 112, a mid portion 120 is disposed. The mid portion 120 typically graduates from a first cylindrical portion 122, of the same outside diameter as the raised section 108 of the forward portion 106, to a frustum-shaped section 124, to a second cylindrical portion 126, of the same outside diameter as the raised section 114 of the aft portion 112. The exact configuration of the cone 102 is not crucial to the concept of the invention as long as the cone 102 is shaped in such a way as to forcibly cause a tubular to expand as the cone 102 is forcibly moved through the tubular.

[0071] Further referring primarily to Figure 1, hardened wear faces 128 are preferably attached to the exterior of cone 102. Preferably the wear faces 128 cover the outer periphery of the mid portion 120 of the cone, and the raised sections fore 108 and aft 114. The wear faces 128 are preferably made from tool steel, D-2 steel, molybdenum disulphide, or tungsten carbide, although other hard, wear-resistant metals or composites may be used. The wear faces 128 are preferably laser welded to the underlying surface 130 of the cone 102. The wear faces may also be attached to the cone surface by other

means such as chemical or mechanical bonding.

[0072] One example of an alternative attachment of the wear faces to the outer surface 130 of the cone 102 is shown in Figure 2. Niches 132 are provided in the outer periphery of the cone 102 for receiving wear face inlays 129. Niches 132 and inlays 129 may extend the length of frustum-shaped section 124, as shown, or over any portion of the cone outer surface 130. The wear face inlays 129 are preferably laser welded in position, but may be attached by other means, such as chemical or mechanical bonding.

[0073] An example of an alternative embodiment of wear faces and their attachment is shown in Figure 3. The wear faces 128 are in the form of rings 134, preferably made up of segments 136 connected by connectors 138. The wear faces 128 are preferably floatingly attached to the cone 102 but may be chemically or mechanically attached to the cone 102. The floating attachment 140 is designed to allow the cone 102 to flex independently of the wear faces 128. Preferably apertures 142 in the wear faces 128 are provided and align with corresponding expansion slots 104 in the cone 102. Fasteners 146, preferably countersunk pins or bolts, retain the wear faces 128 in position relative to the cone while allowing radially slidability. This floating attachment arrangement may be used with any of the embodiments described herein.

[0074] Figure 4 shows an alternate embodiment of cone 102 and wear faces 128. The mid-portion 120 of the cone 102 comprises multiple frusto-conical sections 150 each of which may employ separate wear faces 128. The number, placement and attachment means of the wear faces may vary.

[0075] The preferred method of practicing the invention is depicted with reference primarily to Figure 5. The flexible expansion tool 100 is introduced into the interior of the expandable tubular 400 in well 12. The flexible expansion tool 100 may be reduced in diameter to facilitate its deployment. Once positioned, the tool 100 is actuated and the cone 102 is radially expanded so that the wear faces 128 contact the inner surface 402 of the unexpanded tubular 400. The expansion is continued, forcibly causing the unexpanded tubular 400 to permanently assume an expanded diameter. The tool 100 is forced axially along the tubular, expanding the tubular as it progresses along the tubular length. The tool 100 may be oriented to allow movement downhole or uphole, causing the radial expansion of the tubular 400 for any desired length. The tool 100 has the advantages of radial flexibility to facilitate contracting or expanding as conditions warrant. Further advantages in reduced friction and tool longevity are realized by the fact that the surfaces of the tool that come in contact with the tubular are lined with wear faces.

[0076] The expansion tool 100 may be variably expandable, that is, having a selectively variable diameter to allow the mandrel to reduce its diameter to successfully manoeuvre through areas of the wellbore having a

smaller diameter, as shown in Figure 4, or to enlarge its diameter to more completely expand a tubular, such as screen 400, thereby eliminating or reducing any pockets or gaps 22 between the expanded tubular 400 and the wellbore wall 18. The variations in diameter may be automatically controlled, such that the expansion tool 100 regulates its own diameter, based on well conditions as measured by sensors 200.

[0077] Variable expansion is accomplished via dilator 212, preferably mounted to the interior 103 surface of the cone 102. Multiple dilators may be employed at various locations on the cone. The dilator may be designed to operate within a preselected range of expansion force so that minimum wellbore contact stress is achieved. In operation, the dilator may control the diameter of the cone based on contact stress.

[0078] With reference primarily to Figure 1, the variable diameter cone 102 has one or more sensors 200, preferably attached to the frustum section 120, for detecting one or more physical parameters germane to radial expansion of the tubular, and converting the physical parameters to one or more electronic signals. The sensors may measure contact stress, expansion and compression forces, axial force, downhole pressure, temperature and the like, and any other parameters as desired. Sensors 200 may also measure the diameter of the mandrel at any given point along the wellbore, thereby providing a means of mapping the diameter of the expanded tubular. A processor circuit is electrically connected to the sensors 200 for processing sensor signals. The processor circuit is preferably a commercially available multipurpose microprocessor such as those manufactured by MOTOROLA (registered trade mark) or INTEL (registered trade mark), may also be a more specialized ASIC. The processor circuit may be electrically associated with an electronic memory circuit and/or a transceiver circuit. Preferably, an electronic memory circuit is used to store data signals from the processor circuit and the transceiver circuit is used to send signals as they are generated, to an operator at the surface or to receive signals from the surface relating to control of the tool. A control circuit is electrically connected to the processor circuit. A dilator 212, preferably electro-mechanical, is in turn electrically connected to the control circuit. The dilator 212 is in mechanical contact with the cone 102, preferably within the interior 103.

[0079] In operation, the dilator 212 is used to exert a force extending radially through the cone 102. By increasing or relaxing this radial force, the diameter of the cone 102 can be expanded or contracted. By providing pre-programmed instructions to the processing circuit and/or the control circuit, the electronic signals obtained from the sensors 200 and/or signals from the surface can be used to automatically regulate the degree of expansion of the cone 102. For example, a digital signal processing circuit, wavelet analysis circuit, or neural network circuit, may be used to generate instructions to the control circuit, preferably in real-time response to

sensor 200 signals.

[0080] Referring to Figure 5, the cone 102 may have a seal 300. The seal 300 is a controlled-egress seal, preferably located at the forward end 110 of the cone 102. The seal 300 maintains sealing contact with the inner surface 402 of the tubular 400. The sealing contact is not fluid tight, but permits a controlled amount of fluid F to pass between the seal 300 and the inner surface 402 of the tubular 400. The seal 300 is preferably a labyrinth-type seal, which permits egress of a relatively small amount of well fluid F through the seal.

[0081] The labyrinth-type seal element 302 is advantageous in terms of decreased wear over an elastomeric seal. The labyrinth seal 3-2 also provides an advantage in directing fluid flow ahead of the tool 100, reducing the quantity of debris D in the wellbore and in annular space 20, that could otherwise become forced into openings 404 in the screen assembly 400 upon expansion. The seal element 302 is preferably made from stainless steel or composite material, but may be from any material suitably resistant to corrosion. The seal element 302 is typically attached to a seal carrier 304, which is in turn mechanically attached to the surface of the cone 102 such as by bolting or welding. The exact configuration of the labyrinth seal 300 is not critical to the invention. The seal may be designed to provide controlled fluid flow without physically contacting the tubular itself. The seal location on cone 102 may vary without departing from the spirit of the invention.

[0082] Referring now to Figures 6 and 7, a screen expansion apparatus 500 is shown disposed in a wellbore 502, typically uncased, for expanding screen assembly 400. The screen expansion apparatus 500 is connected to tubing 504 in the conventional manner. Tubing 504 can be rolled tubing or jointed pipe string, and while the wellbore is illustrated in only one manner, it may be vertical, deviated or horizontal.

[0083] Screen expander 500 has an upper body 506 and lower body 508. The upper body 506 is provided with anchoring mechanism 510 movable between a retracted position 512, as shown in Figure 6, and an extended position 514, as shown in Figure 7. Anchoring mechanism may be of any type known in the art, such as slips, as shown, or a packer, and preferably operates from fluid pressure supplied through the tubing string 504. The anchoring mechanism may include multiple devices located at various locations along the length of the tool 500. In the retracted position 512, the slips do not interfere with movement of the screen expander apparatus 500 within the wellbore 502 or within the screen assembly 400. In the extended position 514, the slips engage the screen assembly wall or wellbore, thereby locking the upper body 506 of the screen expander 500 in place. Bleeding pressure from the tubing 504 will release the anchoring mechanism 510, as the anchoring mechanism 510 will return to the retracted position 512.

[0084] The upper body 506 further comprises a force generator 516. The force generator 516 may be of any

kind known in the art and preferably is a hydraulic ram operated using fluid pressure supplied through tubing string 504. The force generator 516 preferably includes a force multiplier 518 such as the double-piston assembly, as shown. The force multiplier 518 has a primary 520 and a secondary 522 piston, operable as is known in the art. The force generator 516, or hydraulic ram, is operable to extend the lower body 508 of the expansion apparatus 500 relative to the upper body 506.

[0085] The lower body 508 supports expansion cone assembly 524 including mandrel 526 having a ramp 528 upon which cone 530 slides. The expansion cone assembly can be of any type known in the art, including the cones heretofore discussed. The expansion cone assembly 524 shown in Figures 6 and 7 operates on fluid pressure as supplied through the tubing 504. Pressure, supplied through port 532, drives cone piston 534 and internal slip 536 to move slidable cone 530 up ramp 528 of mandrel 526. When the cone is moved from its retracted position to its expanded position the cone can be used to expand the screen assembly 400 as the lower body 508 of the screen expansion apparatus 500 is extended.

[0086] In operation, the screen expansion device 500 is lowered into the wellbore 502 to a desired depth adjacent an unexpanded screen assembly 400. During the run-in procedure, the anchoring mechanism 510 and expansion cone 530 are in their retracted positions 512 and 538, respectively. The expansion cone 530 is moved to the expanded position 540 wherein the cone 530 contacts the screen assembly 400 thereby expanding the screen. The cone 530 is moved to its expanded state 540 by providing fluid pressure, via the tubing string 504, through ports 532 to drive cone piston 534 which in turn powers the cone 530 up ramp 528 of mandrel 526. Internal slip 536 is operable to maintain the cone's position and allow later retraction. Expansion of the cone 530 may involve setting the anchoring mechanism 510 and stroking the force generator 516, thereby extending lower body 508.

[0087] Once the expansion cone assembly 524 is in its expanded state, the screen assembly 400 may be radially expanded by the longitudinal advancement of the cone through the screen. The anchoring mechanism 510, such as the slips shown, are moved from the retracted position 512 to the extended position 514 to anchor the upper body 506 of the expansion apparatus 500 in the wellbore 502 or screen assembly 400. The force generator 516 is activated, extending the lower body 508 of the expansion apparatus 500 with respect to the upper body 506 and forcing the expansion cone 530 longitudinally through the screen 400, thereby expanding the screen.

[0088] After the force generator 516 is, preferably, fully extended, the anchoring mechanism 510 is retracted, by lowering the fluid pressure in the tubing. The cone 510, in contact with the screen assembly 400, now acts to anchor the lower body 508 of the expansion appara-

tus 500 with respect to the wellbore 502. The force generator is then retracted. As the force generator is retracted, the upper body 506 is pulled downhole towards the cone 530.

[0089] The process is repeated, creating an inch-worm effect while expanding the screen assembly. A similar method of inch-worming is described in United States Patent Number 5,070,941 to Kilgore, which is incorporated herein by reference for all purposes. The method described herein may be used both for expansion of screen assemblies from the top-down or from the bottom-up.

[0090] Referring to Figure 8, cone 102 can include joint assemblies 600 for added flexibility in the expandable cone. The increase in flexibility reduces the stress placed on the expandable tubular by the expansion cone. The knuckle joint assembly configuration can be repeated multiple times throughout the length of the expansion tool 100 and can be used in conjunction with other tool features herein, such as a hardened wear face 128.

[0091] Joint assembly 600 is preferably a "knuckle joint" assembly, but can be other jointed or articulated assemblies as are known in the art. Knuckle joint 600 forms an articulating joint allowing one cone section 102a to move relative to another cone section 102b about a pivot point 602. Joint arm 604, having a pivot ball 606 of arm 604 attaches to cone section 102a, while the ball 606 of arm 604 mates with socket 608 which may be integral with cone section 102b as shown. Retaining arm 610 is attached to cone section 102b. Joint arm 604 is captured by recess 612 in the retaining arm 610. A flexible sealing element, such as packing 614, with vee-stop 616, seal the joint assembly 600 while allowing limited movement of joint arm 604 about the pivot joint. Use of multiple joint assemblies spaced along the length of cone 102 would allow for greater flexibility and can be added as desired.

[0092] The embodiments shown and described above are only exemplary. Many details are often found in the art such as screen or expansion cone configurations and materials. Therefore, many such details are neither shown nor described. It is not claimed that all of the details, parts, elements, or steps described and shown were invented herein. Even though, numerous characteristics and advantages of the present inventions have been set forth in the foregoing description, together with details of the structure and function of the inventions, the disclosure is illustrative only, and changes may be made in the detail, especially in matters of shape, size and arrangement of the parts within the principles of the inventions to the full extent indicated by the broad general meaning of the terms used in the attached claim.

[0093] It will be appreciated that the invention described above may be modified.

Claims

1. An expansion cone apparatus for use in expanding a tubular in a subterranean well comprising: a cone body; and at least one wear face attached to the cone body.
2. An expansion cone apparatus according to Claim 1, wherein the cone body is 4140 steel.
3. A method of downhole tubular expansion comprising of the steps of: positioning an expansion cone in a tubular positioned in a subterranean wellbore, the expansion cone having a cone body and at least one wear face attached to the cone body; expanding the expansion cone; and moving the expanded cone axially along the tubular thereby radially expanding the tubular.
4. An expansion tool for use in expanding a tubular in a subterranean wellbore comprising: an automatically variable diameter expansion cone; and at least one sensor for detecting parameters within the wellbore, the at least one sensor operably connected to the variable diameter expansion cone, the diameter of the expansion cone automatically varying based on the detected parameters.
5. A method of downhole tubular expansion, the tubular disposed in a wellbore of a subterranean well, comprising of the steps of: positioning an automatically variable diameter expansion cone in the tubular; expanding the cone to a selected diameter; advancing the cone along the tubular, thereby radially expanding the tubular; and automatically varying the diameter of the cone as the cone is advanced along the tubular.
6. An expansion cone apparatus for use in expanding a tubular in a subterranean well comprising: a cone body having an exterior surface; and a controlled egress seal on the exterior surface of the cone body for sealing contact with the tubular.
7. A method of tubular expansion, the tubular positioned in the wellbore of a subterranean well, comprising the steps of: positioning an expansion cone in the tubular, the expansion cone having a cone body with an exterior surface and a controlled egress seal on the exterior surface for sealing contact with the tubular; expanding the expansion cone; and moving the expanded cone axially along the tubular thereby expanding the tubular.
8. A method of expanding a screen assembly in a subterranean wellbore, the method comprising the steps of: (1) positioning, adjacent the screen assembly, an expansion tool having an upper and low-

er body, an anchoring mechanism located in the upper body, an expansion cone assembly located in the lower body, and a force generator operable to vary the distance between the anchoring mechanism and the expansion assembly; (2) radially expanding the expansion assembly; (3) setting the anchoring mechanism; (4) activating the force generator to lengthen the distance between the anchoring mechanism and the expansion assembly, thereby forcing the expansion assembly through the screen assembly and radially expanding the screen assembly; (5) retracting the anchoring mechanism; (6) activating the force generator to shorten the distance between the anchoring mechanism and the expansion assembly; and (7) repeating steps (3) to (6) as desired.

9. An expansion cone apparatus for use in expanding tubulars in a subterranean well comprising: an expansion cone body having multiple cone sections; and at least one joint assembly pivotally connecting the cone sections.
10. A method of tubular expansion, the tubular positioned in the wellbore of a subterranean well, comprising the steps of: positioning an expansion cone in the tubular, the expansion cone having an expansion cone body with multiple cone body sections and at least one joint assembly pivotally connecting the cone sections; expanding the expansion cone; and moving the expanded cone axially along the tubular thereby radially expanding the tubular.

35

40

45

50

55

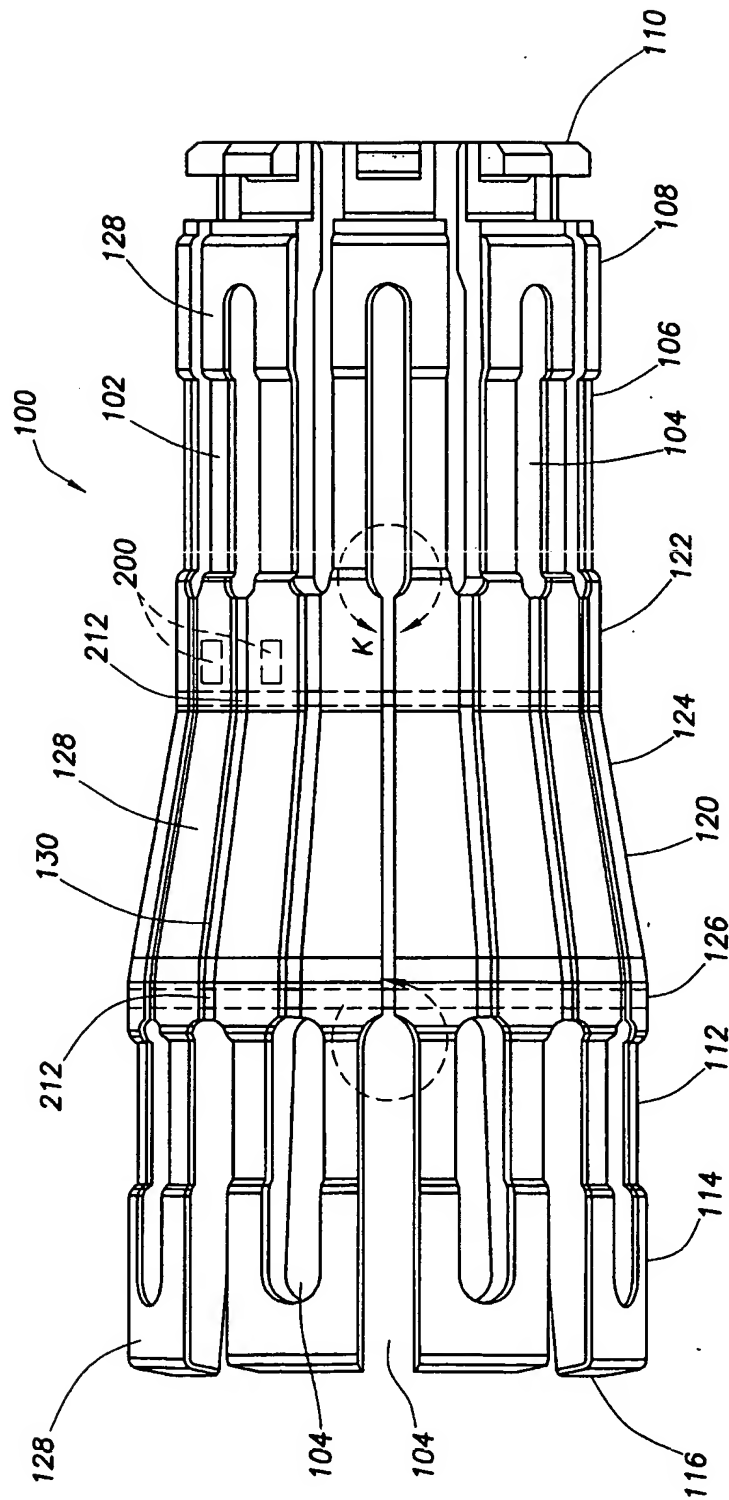


FIG. 1

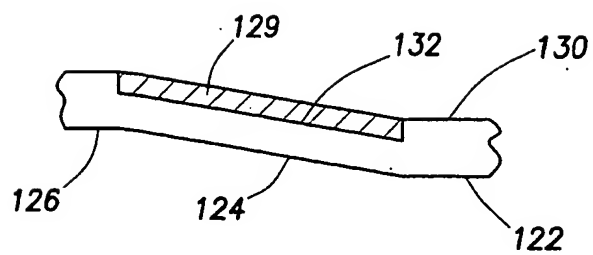


FIG. 2

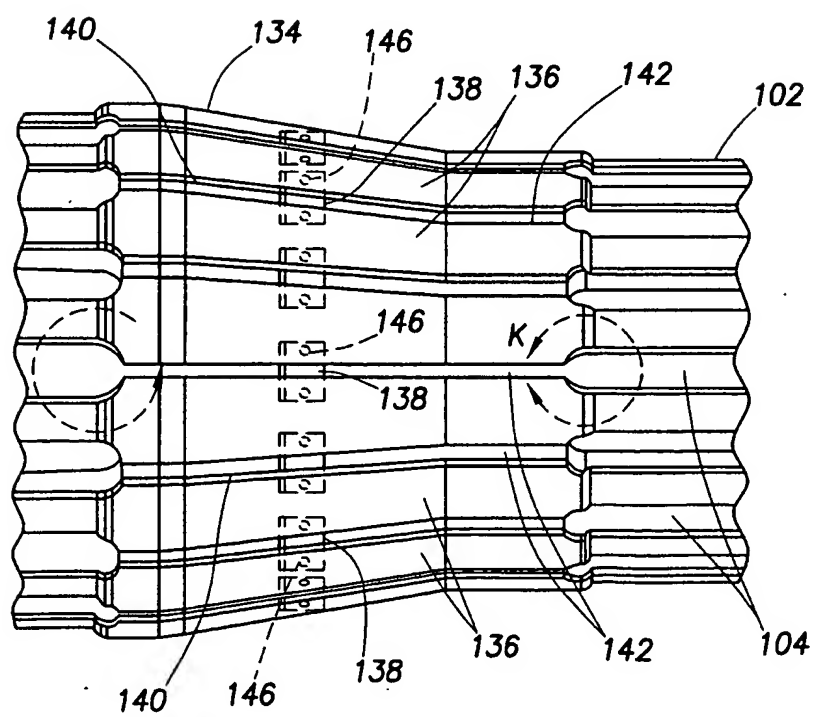


FIG. 3

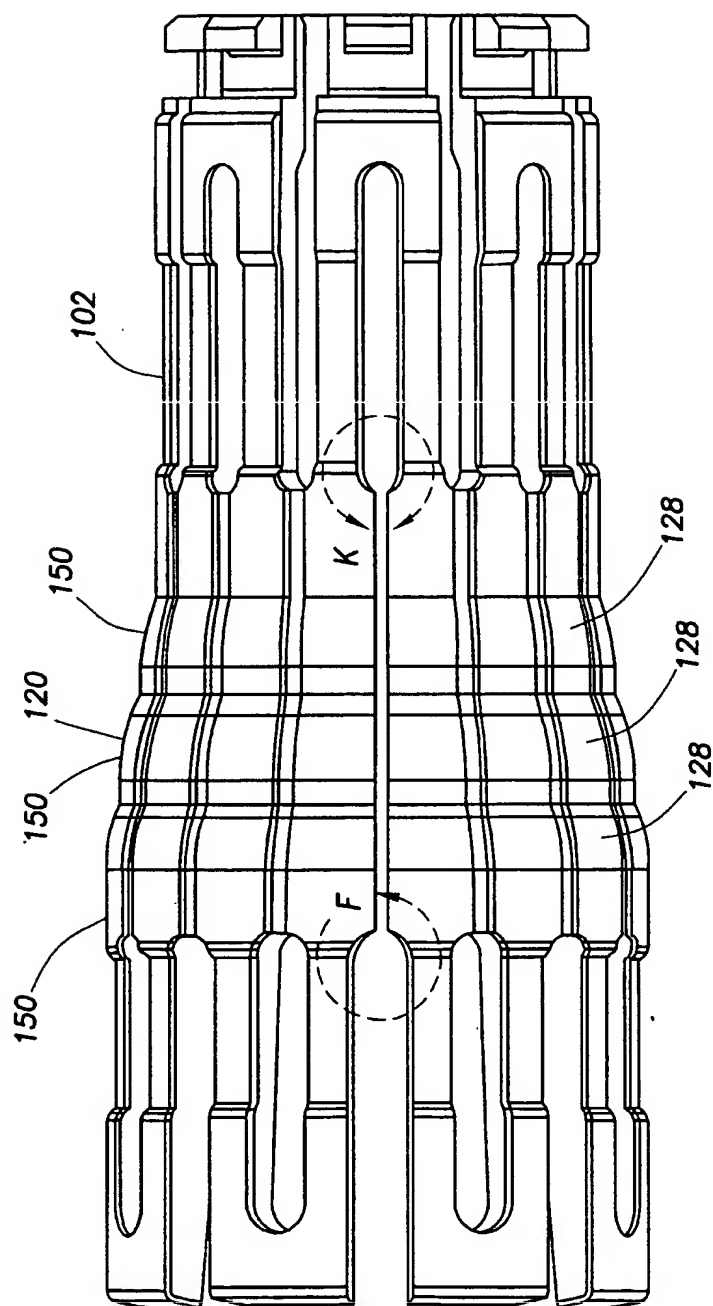
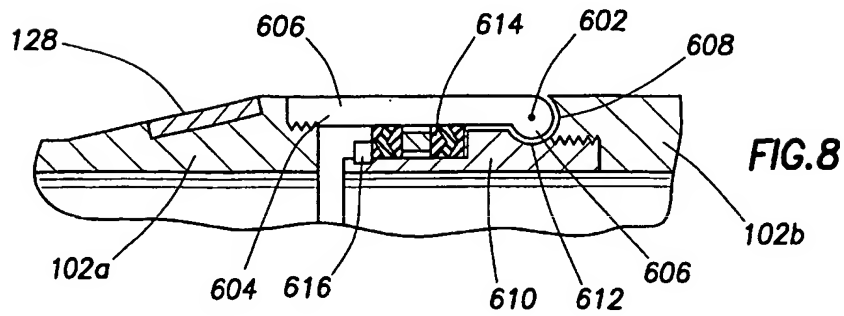
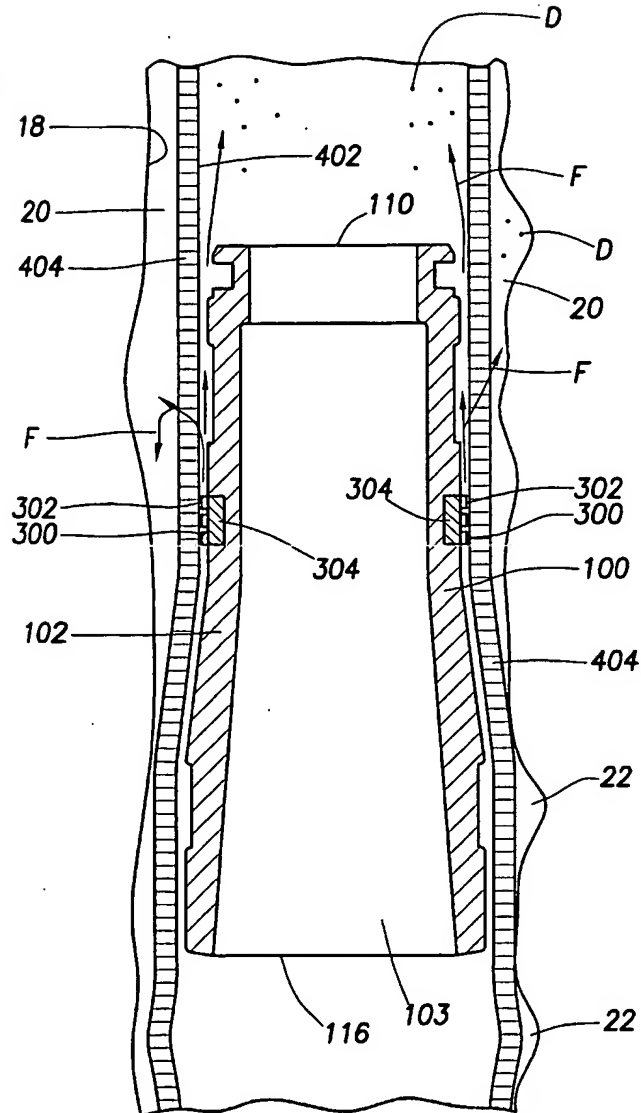


FIG. 4

FIG.5



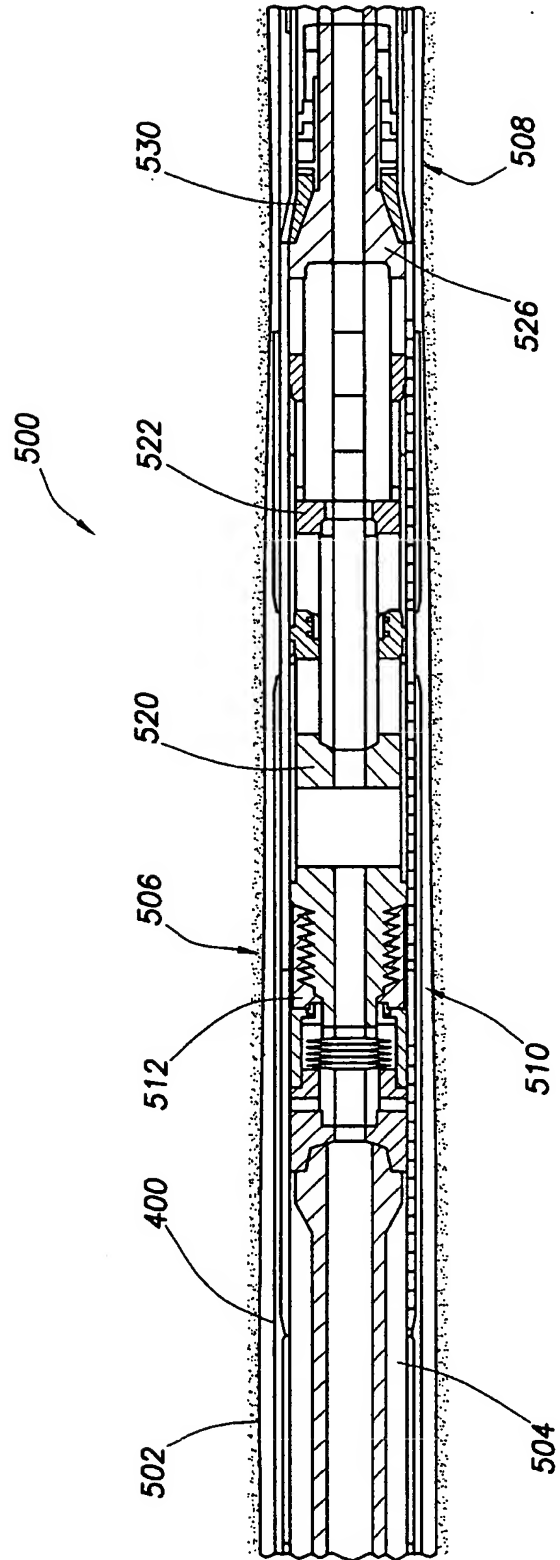


FIG. 6


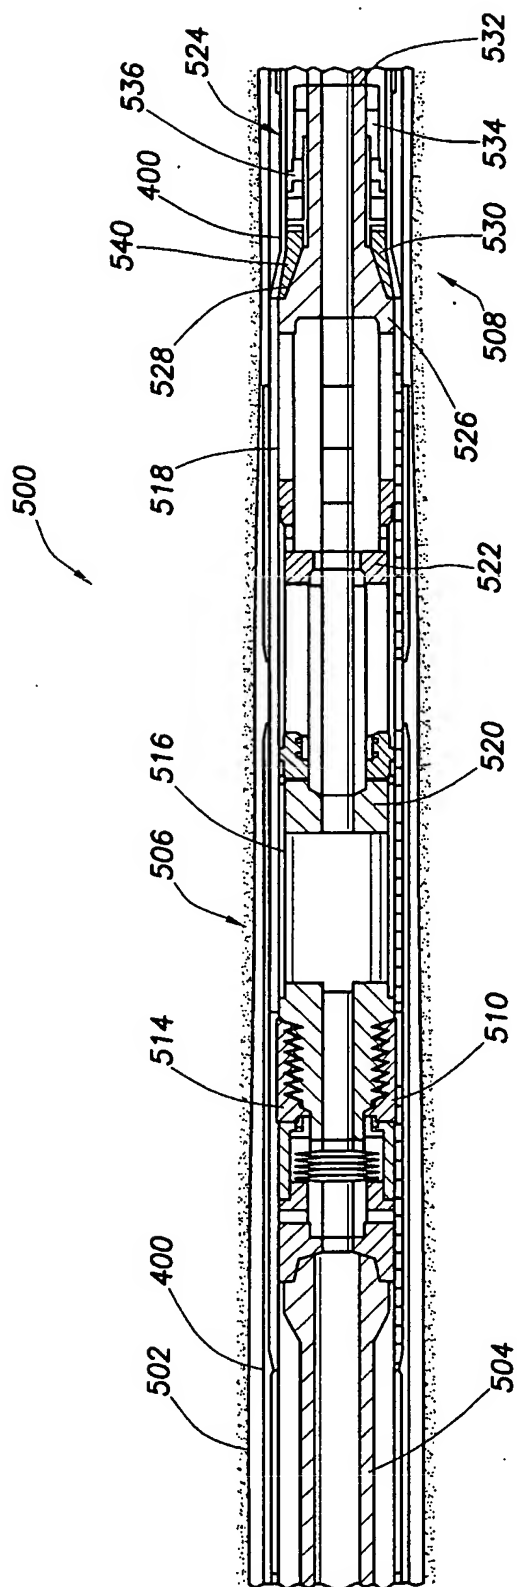


FIG. 7



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 306 519 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
06.07.2005 Bulletin 2005/27

(51) Int Cl.7: **E21B 43/10**

(43) Date of publication A2:
02.05.2003 Bulletin 2003/18

(21) Application number: **02257321.6**

(22) Date of filing: **22.10.2002**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
IE IT LI LU MC NL PT SE SK TR**
Designated Extension States:
AL LT LV MK RO SI

- **Schwendemann, Kenneth**
Flower Mound, Texas 75022 (US)
- **Towers, Darrin**
Carrollton, Texas 75007 (US)
- **Echols, Ralph Harvey**
Dallas, Texas 75287 (US)
- **Shy, Perry Carter**
Southlake, Texas 76092 (US)

(30) Priority: **23.10.2001 US 47628**

(71) Applicant: **Halliburton Energy Services, Inc.**
Dallas, Texas 75381-9052 (US)

(74) Representative: **Curtis, Philip Anthony et al**
A.A. Thornton & Co.,
235 High Holborn
London WC1V 7LE (GB)

(72) Inventors:
• **Gano, John**
Carrollton, Texas 75007 (US)

(54) **Wear-resistant, variable diameter expansion tool and expansion methods**

(57) An expansion tool (100) for radially expanding a tubular deployed in a subterranean well by moving the expansion tool (100) axially through the well. The expansion tool (100) has a cone (102) which has wear fac-

es (128) attached thereto for contacting the interior surface of the pipe, tube, or screen during expansion. In an embodiment, the cone is a variable diameter cone. In an embodiment, the cone has a controlled egress seal thereon.

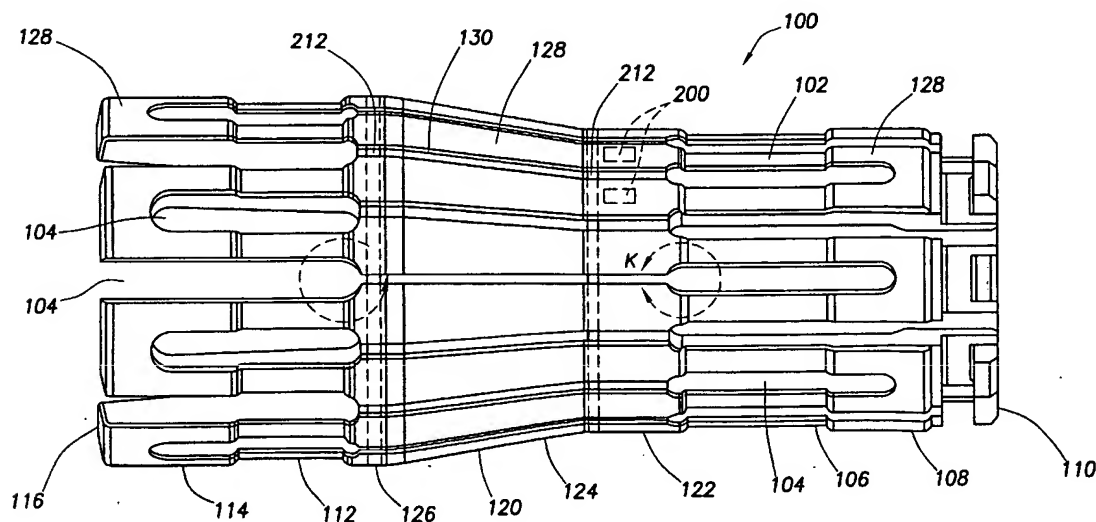


FIG.1

EP 1 306 519 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 25 7321

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 6 112 818 A (CAMPBELL ALASDAIR) 5 September 2000 (2000-09-05)	1,3	E21B43/10
Y	* column 3, line 1 - line 29; figure 1 *	2	
X	DE 100 07 547 A (SHELL INT RESEARCH) 28 September 2000 (2000-09-28)	1,3	
Y	The "wear face attached to the cone body" is disclosed in col. 28, l. 32-37 * column 27, line 57 - column 28, line 43; figure 9 *	2	
A	* column 71, line 5 - line 11; figure 15b *	4,5	
	* column 98, line 6 - line 9; figure 17b *		
X	US 6 142 230 A (SMALLEY ET AL) 7 November 2000 (2000-11-07) * column 15, line 31 - column 16, line 10; example 5 * Claim 8 lacks an inventive step over this document considered alone, because it relates to the application of the anchoring method known from the document to the expansion of a screen.	8	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			E21B
Y	US 4 451 047 A (GIBSON DUANE E ET AL) 29 May 1984 (1984-05-29) * column 6, line 36 - line 38; figure 2 *	2	
Y	US 5 327 964 A (O'DONNELL JOHN A ET AL) 12 July 1994 (1994-07-12) * column 12, line 18 - line 49 *	2	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 17 March 2005	Examiner Tompouloglou, C
CATEGORY OF CITED DOCUMENTS X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons &: member of the same patent family, corresponding document			

 3
EPO FORM 1503 03.92 (P04C01)



European Patent
Office

Application Number
EP 02 25 7321

CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claim(s):
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet 8

- ☐ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.
- ☒ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
1-5, 8
- ☐ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:



European Patent
Office

**LACK OF UNITY OF INVENTION
SHEET B**

Application Number
EP 02 25 7321

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. claims: 1-3

Wear face attached to the expansion cone body

2. claims: 4,5

Diameter of the expansion code varying based on detected
parameters

3. claims: 6,7

Controlled egress seal on the exterior surface of the
expansion cone body

4. claim: 8

Anchoring process related to an expansion tool

5. claims: 9,10

Expansion cone with multiple cone sections

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 25 7321

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

17-03-2005

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6112818 A	05-09-2000	AU 7579096 A	29-05-1997
		DE 69613138 D1	05-07-2001
		DE 69613138 T2	15-11-2001
		EP 0859903 A2	26-08-1998
		WO 9717527 A2	15-05-1997
DE 10007547 A	28-09-2000	AU 770008 B2	12-02-2004
		AU 1641700 A	31-08-2000
		BR 0000923 A	26-09-2000
		CA 2299076 A1	25-08-2000
		DE 10007547 A1	28-09-2000
		GB 2348657 A ,B	11-10-2000
		GB 2384800 A ,B	06-08-2003
		GB 2384801 A ,B	06-08-2003
		GB 2384802 A ,B	06-08-2003
		GB 2384803 A ,B	06-08-2003
		GB 2384804 A ,B	06-08-2003
		GB 2384805 A ,B	06-08-2003
		GB 2384806 A ,B	06-08-2003
		GB 2384807 A ,B	06-08-2003
		GB 2384808 A ,B	06-08-2003
		NO 20000924 A	28-08-2000
		US 2003098154 A1	29-05-2003
		US 2003094278 A1	22-05-2003
		US 2003094279 A1	22-05-2003
		US 2003121558 A1	03-07-2003
		US 2003173090 A1	18-09-2003
		US 6640903 B1	04-11-2003
		US 6604763 B1	12-08-2003
		US 6557640 B1	06-05-2003
		US 2004188099 A1	30-09-2004
		US 2004182569 A1	23-09-2004
		US 2005045324 A1	03-03-2005
		US 2005028988 A1	10-02-2005
		US 2005045341 A1	03-03-2005
		US 2005039928 A1	24-02-2005
		US 2002060068 A1	23-05-2002
		US 2002050360 A1	02-05-2002
		US 2002060078 A1	23-05-2002
		US 2002040787 A1	11-04-2002
		US 2002060069 A1	23-05-2002
US 6142230 A	07-11-2000	US 5957195 A	28-09-1999
		US 5785120 A	28-07-1998
		AU 1054400 A	22-05-2000
		CA 2347895 A1	11-05-2000

EPO FORM P4439

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 25 7321

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

17-03-2005

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6142230	A		EP 1127210 A1	29-08-2001
			WO 0026502 A1	11-05-2000
			NO 20011854 A	12-06-2001
			AU 732007 B2	12-04-2001
			AU 4955097 A	03-06-1998
			CA 2270986 A1	22-05-1998
			EP 1491718 A2	29-12-2004
			EP 0948703 A2	13-10-1999
			WO 9821444 A2	22-05-1998
			NO 991666 A	23-06-1999
			NO 20021323 A	23-06-1999
US 4451047	A	29-05-1984	CA 1172667 A1	14-08-1984
			DE 3228583 A1	17-02-1983
			FR 2510711 A1	04-02-1983
			GB 2103310 A , B	16-02-1983
			JP 1584021 C	22-10-1990
			JP 2010313 B	07-03-1990
			JP 58028082 A	18-02-1983
US 5327964	A	12-07-1994	NL 8203028 A	16-02-1983
			US 5309621 A	10-05-1994
			AU 3940993 A	21-10-1993
			WO 9318883 A1	30-09-1993